

T15 REV

Per escavatori 10.0-25.0 ton / For excavators 10.0-25.0 ton

TRINCIATRICI IDRAULICHE
HYDRAULIC MULCHERS



T15 MZ130 REV	
T15 MZ160 REV	



HF6
Ø max 8 cm

di serie
standard equipment



KF7
Ø max 6 cm

T15 FR130 REV	
T15 FR160 REV	



HF11 (FR130)
HF13 (FR160)
Ø max 25 cm

di serie
standard equipment



HF10 (FR130)
HF12 (FR160)
Ø max 25 cm

T15 DF130 REV	
T15 DF160 REV	



HF14
Ø max 25 cm


di serie
standard equipment



HF15
Ø max 20 cm



MZ

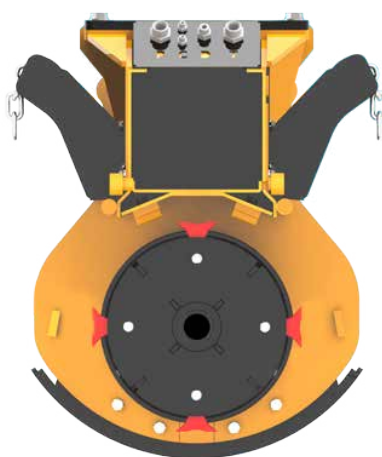










FR



DF



Modello Model	 (ton)	 (cm/inch)	 (LxAxH cm/inch)	 (kg/lbs)	 (motore a pistoni c.v. piston motor v. c.)	 (L/min gal/min)	 bar/psi (min-max)		Rotore Rotor	
T15 MZ130 REV	10.0 - 25.0	130 52	160x80x85 63x32x34	650 1.433	32/64	90-180 25-50	200-250 2.900-3.600	1 (50 mm)	elicoidale helical	20
T15 MZ160 REV	12.0-25.0	160 63	190x80x85 75x32x34	750 1.653	32/64	90-180 25-50	200-250 2.900-3.600	1 (50 mm)	elicoidale helical	20
T15 FR130 REV	12.0-25.0	130 52	160x80x85 63x32x34	920 2.028	32/64	90-180 25-50	200-250 2.900-3.600	1 (50 mm)	4 file 4 lines	26
T15 FR160 REV	15.0-25.0	160 63	190x80x85 75x32x34	1.020 2.249	32/64	90-180 25-50	200-250 2.900-3.600	1 (50 mm)	4 file 4 lines	32
T15 DF130 REV	12.0-25.0	130 52	160x80x85 63x32x34	950 2.094	32/64	90-180 25-50	200-250 2.900-3.600	1 (50 mm)	elicoidale helical	36
T15 DF160 REV	16.0-25.0	160 63	190x80x85 75x32x34	1.050 2.315	32/64	90-180 25-50	200-250 2.900-3.600	1 (50 mm)	elicoidale helical	42

CARATTERISTICHE TECNICHE E DOTAZIONI STANDARD

- Motore a pistoni a cilindrata variabile (regolazione manuale).
- MZ Rotore elicoidale con mazze bonificate e coltelli intercambiabili.
- FR Rotore forestale con mazze a scomparsa.
- DF Rotore forestale a denti fissi.
- Trasmissione moncinghia dentata preallungata HTD ad alte prestazioni.
- Cofanatura interna a doppia cassa con intercapedine.
- Protezione carter cinghie.
- Trinciatrice simmetrica per un taglio più veloce con la rotazione dell'escavatore.
- Bocche d'ingresso e d'uscita completamente identiche.
- Cofano anteriore regolabile idraulicamente, apribile completamente per una maggiore capacità di taglio.
- Supporti rotore interni con labirinto per la protezione dei cuscinetti dalle impurità.
- Cuscinetti orientabili di prima qualità.
- Blocco valvole comprensivo di valvola prioritaria per regolazione della portata olio, antiurto (valvola di max pressione), anticavitazione.
- Protezioni antinfortunistiche con catene a norma CE.

TECHNICAL FEATURES AND STANDARD EQUIPMENT

- Piston motor variable displacement (manual adjustment).
- MZ Helicoidal Rotor with hammers austempered and cutting blade interchangeable.
- FR Forestal with 360° rotating hammer.
- DF Forestal rotor, fixed teeth.
- Toothed high-performance belts transmission.
- Internally reinforced double-case body with interspace.
- Protective belts cover.
- Symmetric hearing head, for faster cut with rotation of the excavator.
- Input and output mouths completely identical, adjustable
- Hydraulic frontal hood, fully openable for higher cutting capacity.
- Inside Rotor Supports with "labyrinth" for the protection of the bearings from the impurities.
- Adjustable bearings of 1st quality.
- Valves block complete with priority valve for adjusting oil flow, anti-shock valve (pressure relief valve), anti-cavitation.
- Accident prevention chains protections according to EC directives.

ACCESSORI

- 1 - Attacco sella a perni 8.1-12.0 ton.
- 1.1 - Kit perni 8.1-12.0 ton.
- 2 - Attacco sella a perni 12.1-16.0 ton.
- 2.1 - Kit perni 12.1-16.0 ton.
- 3 - Attacco sella a perni 16.1-25.0 ton.
- 3.1 - Kit perni 12.1-16.0 ton.
- 4 - Kit tubi Lg. 2.5 metri.
- 5 - Apertura meccanica cofano anteriore
- 6 - Apertura idraulica cofano posteriore (contemporaneamente a cofano anteriore)
- 7 - Elettrovalvola per cofano idraulico

ACCESSORIES

- 1 - Mounting hitch & pins 8.1-12.0 ton.
- 1.1 - Pins kit 8.1-12.0 ton.
- 2 - Mounting hitch & pins 12.1-16.0 ton.
- 2.1 - Pins kit 12.1-16.0 ton.
- 3 - Mounting hitch & pins 16.1-25.0 ton.
- 3.1 - Pins kit 16.1-25.0 ton.
- 2 - Hoses kit Lg. 2.5 meters.
- 3 - Front hood mechanical opening
- 4 - Rear hood hydraulic opening (simultaneously to front hood)
- 5 - Electrovalve for hydraulic hood



1